


L560

DIFFUSION MEDIA


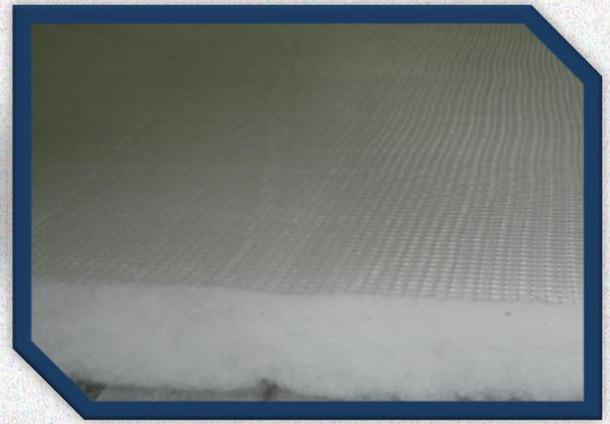


The fiber structure and full-depth loaded adhesive of the L560 Series provide an extremely efficient, yet low resistance media allowing for the ideal painting environment.

- Actual thickness of 0.75"
- Temperature resistance up to 250° F
- Available in bulk rolls as well as cut blankets and pads

Performance Measure	Air Filtration Co., Inc. L560 Media*
Initial Resistance (100 fpm)	0.22 w.g.
Average Efficiency 5.5-7 Microns	99.0%
Average Efficiency 7-10 Microns	99.9%
Rating (100 fpm)	MERV 9

*All data in above table is per ASHRAE Standard 52.2 Test #12-1394

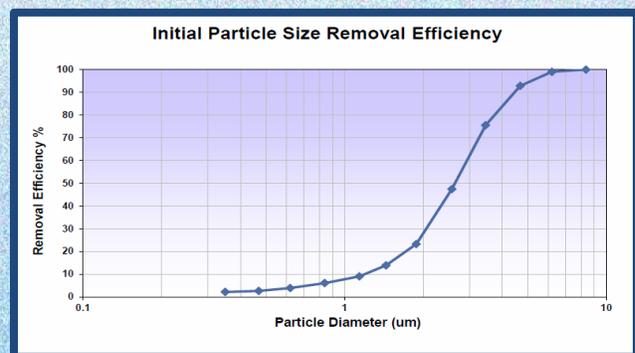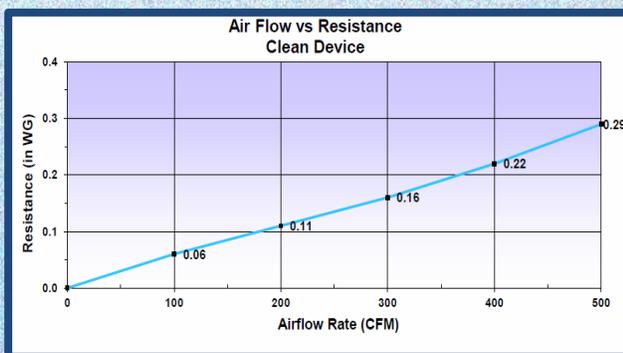

EPA COMPLIANT PAINT ARRESTORS
 INTAKE FILTERS & **DIFFUSION MEDIA**
 PREFILTERS & EXTRACTION FILTERS
 SPRAY BOOTH ACCESSORIES
 PROTECTIVE COATINGS

800.848.5859



WWW.AFCFILTERS.COM